


# Renishaw metrology fixtures and precision styli for Equator-X™ 500 gauging systems

Renishaw's Equator-X™ 500 system brings unique capability to the shop floor with its dual measurement functionality; Absolute and Compare. You can select the best inspection method for your process challenge, effectively deploying two systems in one.

To expand the functionality of the Equator-X 500 system, we provide a selection of styli and fixturing accessories. These components support a wide range of measurement tasks and help maintain high performance across various applications.

## Features and benefits

- Fixturing solutions can be assembled to base plates, which increases throughput and avoids downtime in inspection.
- Our modular fixturing solutions are designed to provide a repeatable and reproducible base for metrology inspections.
- Set-ups can be documented and repeated with accuracy using our alpha-numerically labelled base plates and FixtureBuilder software.
- Our fixtures and styli are available in sets that can be expanded to create a bespoke solution for your requirements.

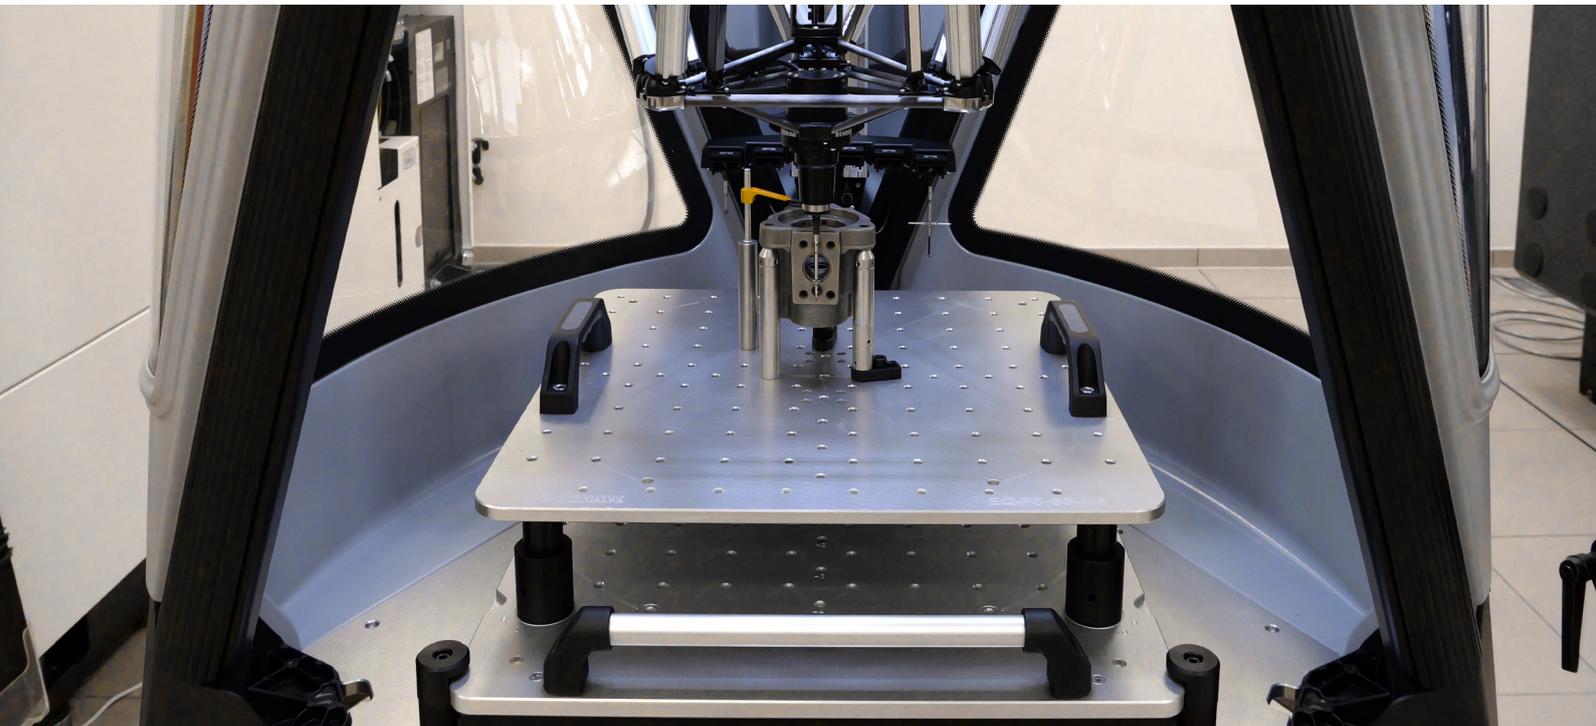

## Base plates for Equator-X 500 gauging systems

Renishaw's fixturing base plates provide a platform for fixtures on an Equator-X 500 gauging system.

The base plates mount directly to the system bed using a kinematic mounting system.

The base plates are precision-machined to tight tolerances, making set-ups reliable and repeatable.

Base plates are available in M6, M8, and 1/4-20 thread sizes.

Part number	Thread type	Hole spacing
R-PCX-10510510-25-6	M6	25.0 mm
R-PCX-10510510-30-8	M8	30.0 mm
R-PCX-402020-1-20	1/4-20	1.0 in
A-6078-0206	M6	50.0 mm
A-6078-209	M8	50.0 mm



## Equator-X™ adaptor plate

A low-profile adaptor plate for Equator-X™ 500 that features a repeatable kinematic interface. This allows for rapid and reliable mounting of existing Equator 300 tiles on an Equator-X 500 gauge, thereby enabling rapid changeover between multi-hole Equator-X 500 plates and tile-based fixtures.

Part number	Height	Width	Thickness
R-PCX-53ADPT	10.0 mm	510.0 mm	510.0 mm



## 3-jaw chuck

3-jaw chucks are for holding cylindrical, turned and round workpieces. The jaws can be removed and reversed to hold the workpiece by their outer diameter (OD) or inner diameter (ID). The optional stand can be used to mount the chuck vertically.

Part number	Material	Thread	Height	OD clamping range	ID clamping range
R-CJ-84-3	Steel*	M4/M6/M8/ 1/4-20	30 mm/ 1.18 in	0.5 mm to 102.5 mm/ 0.02 in to 4.04 in	6.5 mm to 108.0 mm/ 0.26 in to 4.25 in
R-CJ-84-STAND	Aluminium	M4/M6/M8/ 1/4-20	—	—	—



**NOTE:** Includes socket cap head screws.

**NOTE:** \*Jaws are aluminium.



## Rotational angle vice

A flexible and versatile vice that allows variable orientation of your workpieces. The vice provides convenient staging for various kinds of workpieces. Pivot range from 0° to 90° and rotational range of 360°.

Part number	Material	Thread	Height	Jaws	Adjustments
R-CRAV	Aluminium	M4/M6/ 1/4-20	91.8 mm/ 3.61 in	32.0 mm/ 1.26 in	1.0 mm to 63.0 mm/ 0.04 in to 2.48 in

**NOTE:** Jaws are steel as standard but aluminium jaws are available as an option.



## Fixturing component sets

Renishaw fixturing sets come in various sizes and include different thread types to meet your application needs.

The components are manufactured using durable 303 stainless steel or anodised 6082 aluminium that ensures longevity.

The sets are housed within a practical storage case and include everything you need to create fixtures to suit your workpiece sizes and shapes.

You can expand the standard sets with our range of compatible add-ons, including magnets and standoffs.



Part number	Size	Number of components	Thread type
R-C-SET-INT-6	Intermediate	111	M6
R-C-SET-INT-8	Intermediate	111	M8
R-C-SET-INT-20	Intermediate	111	1/4-20
<b>Magnet add-on sets</b>			
R-M-SET-BSC-6	Basic	12	M6
R-M-SET-BSC-8	Basic	12	M8
R-M-SET-BSC-20	Basic	12	1/4-20
R-M-SET-INT-6	Intermediate	25	M6
R-M-SET-INT-8	Intermediate	25	M8
R-M-SET-INT-20	Intermediate	25	1/4-20
<b>Standoff add-on sets</b>			
R-S-SET-BSC-6	Basic	34	M6
R-S-SET-BSC-8	Basic	34	M8
R-S-SET-BSC-20	Basic	34	1/4-20

## Styli kits

Renishaw styli kits come in a range of sizes and are tailored to suit the Equator-X 500 system's metrology applications.

Each kit includes various stylus components, such as stylus holders, ruby styli, extensions, star styli, and knuckles.

Our kits offer the modularity and reliability engineers need to address metrology challenges, whether dealing with tight tolerances or complex geometries.



Part number	Description	Number of components
A-5000-0076	Equator-X 500 basic stylus kit	17
A-5000-0077	Equator-X 500 advanced stylus kit	30
A-5000-0078	Equator-X 500 OPTIMUM™ diamond basic stylus kit	12
A-5000-0084	Equator-X 500 OPTIMUM™ diamond advanced stylus kit	16

### A-5000-0076 - Equator-X 500 basic stylus kit

Part number	Description	Quantity
A-2237-1702	SH25-2A holder	1
A-5004-5101	SH25-2 holder with 5-way connector	1
A-5000-3603	M2, Ø2 mm, ruby ball with stainless steel stem, length 20 mm	5
A-5000-7806	M2, Ø1 mm, ruby ball with stainless steel stem, length 10 mm, EWL* 4.5 mm	1
A-5003-0044	M2, Ø4 mm, ruby ball with tungsten carbide stem, length 40 mm, EWL* 40 mm	1
A-5003-2280	M2, carbon fibre extension, length 40 mm	1
A-5004-7591	M2, stainless steel extension, length 30 mm	1
A-5004-7585	M2, stainless steel extension, length 10 mm	1
A-5004-7592	M3 to M2 stainless steel adaptor, length 5 mm	2
A-5000-7809	M2, Ø18 mm, silver steel disc, width 1.5 mm with roller	1
A-5004-7582	M2/M3 tightening tool	2
–	Case	1

**NOTE:** EWL\* - Effective working length.

## A-5000-0077 - Equator-X 500 advanced stylus kit

Part number	Description	Quantity
A-2237-1702	SH25-2A holder	2
A-5004-5101	SH25-2 holder with 5-way connector	1
A-5000-3603	M2, Ø2 mm, ruby ball with stainless steel stem, length 20 mm	5
A-5000-7806	M2, Ø1 mm, ruby ball with stainless steel stem, length 10 mm, EWL* 4.5 mm	2
A-5003-0044	M2, Ø4 mm, ruby ball with tungsten carbide stem, length 40 mm, EWL* 40 mm	2
A-5003-4862	M3, Ø8 mm, ruby ball with carbon fibre stem, length 75 mm, EWL* 75 mm	1
A-5003-2280	M2, carbon fibre extension, length 40 mm	2
A-5004-7591	M2, stainless steel extension, length 30 mm	2
A-5004-7585	M2, stainless steel extension, length 10 mm	2
A-5004-7592	M3 to M2 stainless steel adaptor, length 5 mm	3
A-5000-7809	M2, Ø18 mm, silver steel disc, width 1.5 mm with roller	1
A-5555-0297	M2, Ø8 mm, ceramic disc, width 1.5 mm without roller	1
A-5000-7811	M2, 4 ball star, Ø1 mm ruby balls, 10 mm span	1
A-5000-3627	M2, 5-way stylus centre, length 7.5 mm	1
A-5000-9902	M2, rotary knuckle, length 16.5 mm	2
A-5004-7582	M2/M3 tightening tool	2
-	Case	1

**NOTE:** EWL\* - Effective working length.

## A-5000-0078 - Equator-X 500 OPTiMUM™ diamond basic stylus kit

Part number	Description	Quantity
A-2237-1702	SH25-2A holder	1
A-5004-5101	SH25-2 holder with 5-way connector	1
A-5000-0139	M2, Ø2 mm, diamond coated ball with stainless steel stem, length 20 mm, EWL* 14.0 mm	1
A-6560-5304	M2, Ø1 mm, diamond coated ball with tungsten carbide stem, length 10 mm, EWL* 4.0 mm	1
A-5000-0138	M2, Ø4 mm, diamond coated ball with tungsten carbide stem, length 40 mm, EWL* 40 mm	1
A-5003-2280	M2, carbon fibre extension, length 40 mm	1
A-5004-7591	M2, stainless steel extension, length 30 mm	1
A-5004-7585	M2, stainless steel extension, length 10 mm	1
A-5004-7592	M3 to M2, stainless steel adaptor, length 5 mm	2
A-5004-7582	M2/M3 tightening tool	2
-	Case	1

**NOTE:** EWL\* - Effective working length.

## A-5000-0084 - Equator-X 500 OPTiMUM™ diamond advanced stylus kit

Part number	Description	Quantity
A-2237-1702	SH25-2A holder	1
A-5004-5101	SH25-2 holder with 5-way connector	1
A-5000-0139	M2, Ø2 mm, diamond coated ball with stainless steel stem, length 20 mm, EWL* 14.0 mm	5
A-6560-5304	M2, Ø1 mm, diamond coated ball with tungsten carbide stem, length 10.0 mm, EWL* 4.0 mm	1
A-5000-0138	M2, Ø4 mm, diamond coated ball with tungsten carbide stem, length 40 mm, EWL* 40.0 mm	1
A-5003-2280	M2, carbon fibre extension, length 40 mm	1
A-5004-7591	M2, stainless steel extension, length 30 mm	1
A-5004-7585	M2, stainless steel extension, length 10 mm	1
A-5004-7592	M3 to M2, stainless steel adaptor, length 5 mm	2
A-5004-7582	M2/M3 tightening tool	2
–	Case	1

**NOTE:** EWL\* - Effective working length.

### SST250 stylus setting tool

Our stylus setting tool is designed to enhance accuracy and efficiency for Equator and CMM users.

The SST250 helps you set stylus angles with precision, and reduces the risk of errors. It ensures high-quality results, allowing you to spend less time on manual adjustments and more time on productive tasks.

It eliminates the need for skilled operators to be present for stylus changes, leading to significant savings in set-up time and machine downtime.

The intuitive design allows even those with less experience to set A and B angles within one degree of accuracy. This ensures reliable results every time.



## SST250 kits

Part number	Description	Number of components
A-7286-0003	SST250 basic kit	6
A-7286-0002	SST250 intermediate kit	9

### A-7286-0003 - SST250 basic kit

Part number	Description	Quantity
A-7286-0003	SST250 B angle	1
A-5555-0286	M3 stainless steel extension, length 30 mm	1
A-5004-7591	M2, stainless steel extension, length 30 mm	1
A-5004-7582	M2/M3 tightening tool	2
–	Case	1

### A-7286-0002 - SST250 intermediate kit

Part number	Description	Quantity
A-7286-0015	SST250 A angle	1
A-7286-0003	SST250 B angle	1
P-TL01-0027	1.5 mm ball end hex key	1
P-TL01-0089	0.89 mm wrench key	1
A-5555-0286	M3 stainless steel extension, length 30 mm	1
A-5004-7591	M2, stainless steel extension, length 30 mm	1
A-5004-7582	M2/M3 tightening tool	2
–	Case	1

## Datum ball pillar

The datum ball pillar helps you position a datum ball in the right place for the Equator-X gauging system. It can also be used on standard fixturing plates, including for CMMs.

Part number	Description	Number of components
A-5000-0215	Datum ball pillar kit	11

**NOTE:** A datum ball is not supplied with the kit, it must be purchased separately.

Compatible datum ball part numbers are


- A-1034-0005 (D12 mm datum ball)
- A-1034-0023 (D19 mm datum ball)
- A-1034-0002 (D25 mm datum ball)
- A-1034-0032 (3/4 in datum ball)
- A-1034-0036 (1 in datum ball)



## 3D fixture modelling software

FixtureBuilder is 3D fixture modelling software for creating fixturing set-ups. You can drag and drop component models onto the base plate or another component.

The 'Build it' feature generates work instructions and supports offline programming for CMM, Equator gauging, and vision inspection.

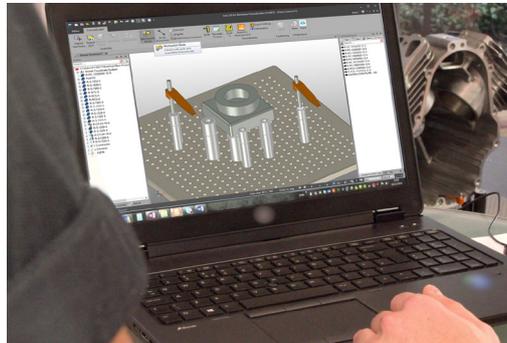

## 12-month subscription service

We offer a complimentary 12-month subscription to our FixtureBuilder 3D modelling software when you buy qualifying products.

For subscription or perpetual licences, visit our online store or contact your local Renishaw office.

Part number	Licence description
CS-SOF-SW-17-FBCU	FixtureBuilder licence sold with Renishaw Licence Manager software.
CS-SOF-SUBS-17-FBNU	Annual subscription. Sent as an activation code for named user.
CS-SOF-SW-17-FBNRMS	Renishaw Licence Manager software. Controlled licence.
CS-SOF-SW-17-FBNU	FixtureBuilder licence. Distributed via download.
CS-SOF-SW-17-FBTRANS	Additional translator module for CATIA, ProE, UGNX, Solidworks and Inventor. Distributed via download.
A-6490-0052	FixtureBuilder licence for offline users. Distributed on a dongle, transferable between workstations.
A-6490-0055	Renishaw Licence Manager hardware. Dongle controlled.

## Training and support from Renishaw

To use a free 30-day trial, watch training videos, read our frequently asked questions and learn more about our support services, visit [www.renishaw.com/fixturebuilder](http://www.renishaw.com/fixturebuilder).

[www.renishaw.com/contactus](http://www.renishaw.com/contactus)

 #renishaw

 UK +44 (0) 1453 524524  [uk@renishaw.com](mailto:uk@renishaw.com)

USA  +1 847 286 9953

 [usa@renishaw.com](mailto:usa@renishaw.com)

© 2025 - 2026 Renishaw plc. All rights reserved. This document may not be copied or reproduced in whole or in part, or transferred to any other media or language by any means, without the prior written permission of Renishaw.

RENISHAW® and the probe symbol are registered trade marks of Renishaw plc. Renishaw product names, designations and the mark 'apply innovation' are trade marks of Renishaw plc or its subsidiaries. Other brand, product or company names are trade marks of their respective owners.

WHILE CONSIDERABLE EFFORT WAS MADE TO VERIFY THE ACCURACY OF THIS DOCUMENT AT PUBLICATION, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS AND LIABILITY, HOWSOEVER ARISING, ARE EXCLUDED TO THE EXTENT PERMITTED BY LAW. RENISHAW RESERVES THE RIGHT TO MAKE CHANGES TO THIS DOCUMENT AND TO THE EQUIPMENT, AND/OR SOFTWARE AND THE SPECIFICATION DESCRIBED HEREIN WITHOUT OBLIGATION TO PROVIDE NOTICE OF SUCH CHANGES.

Renishaw plc. Registered in England and Wales. Company no: 1106260. Registered office: New Mills, Wotton-under-Edge, Glos, GL12 8JR, UK.

Part no.: H-1000-0163-02-B

Issued: 02.2026