

Universal calibration tower



This document may not be copied or reproduced in whole or in part, or transferred to any other media or language, by any means, without the prior written permission of Renishaw.

The publication of material within this document does not imply freedom from the patent rights of Renishaw plc.

Disclaimer

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

Trademarks

RENISHAW® and the probe emblem used in the RENISHAW logo are registered trademarks of Renishaw plc in the UK and other countries.

apply innovation is a trademark of Renishaw plc.

All other brand names and product names used in this document are trade names, service marks, trademarks, or registered trademarks of their respective owners.

Packaging


To aid end user recycling and disposal the materials used in the different components of the packaging are stated here:


Packaging component	Material	94/62/EC code	94/62/EC number
Storage box	Polypropylene	PP	5
Inner foam inserts	Low density Polyethylene	LDPE	4

Renishaw part no: H-1000-5421-02-A


Issued: 05.2018


Universal calibration tower assembly instructions

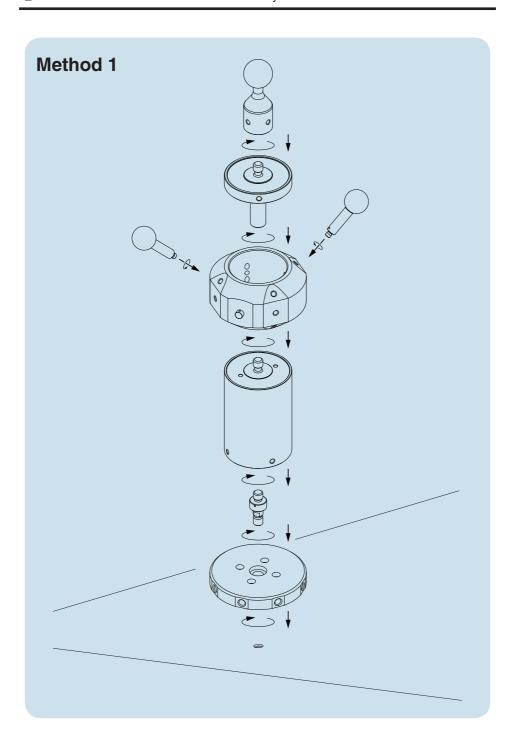


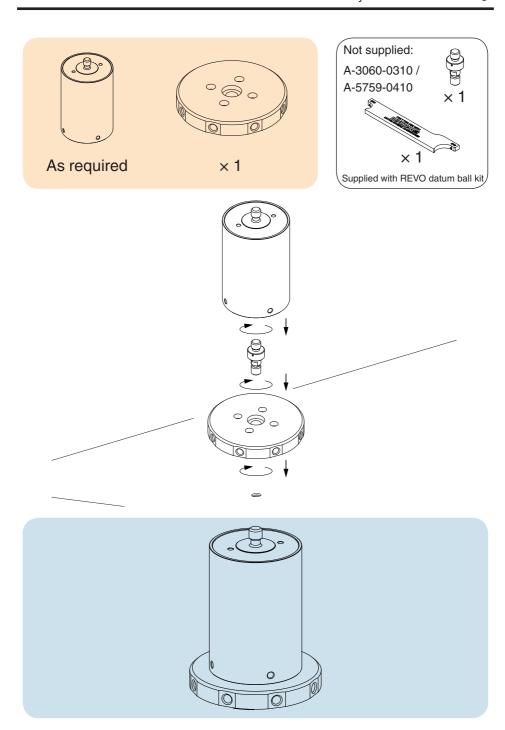








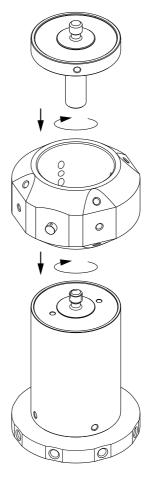







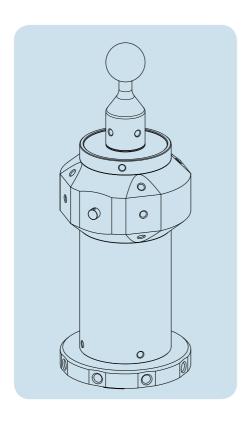


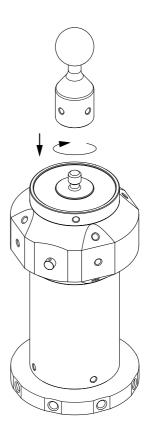











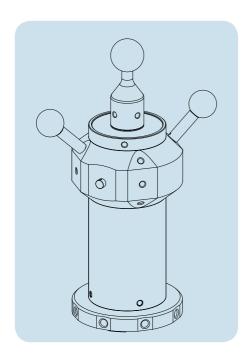


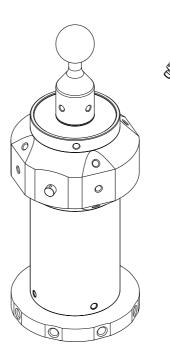


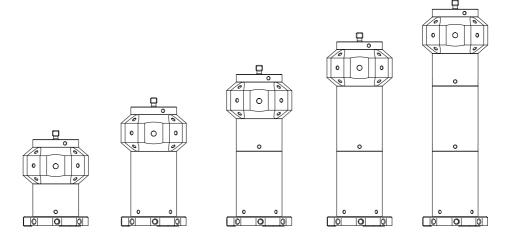


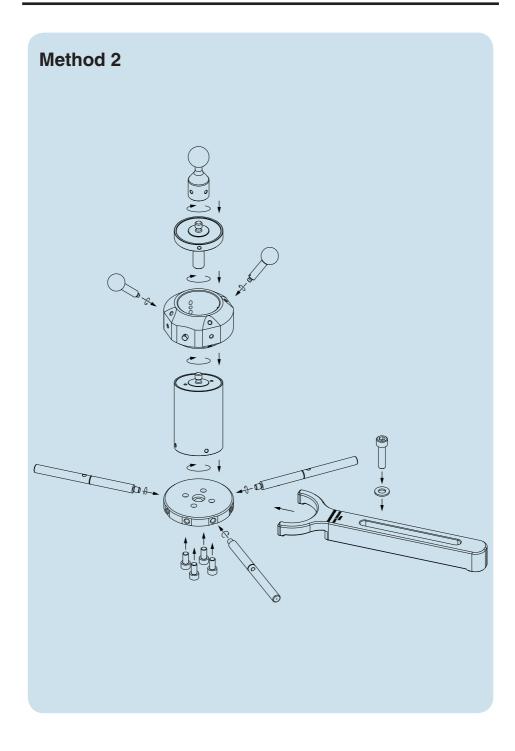


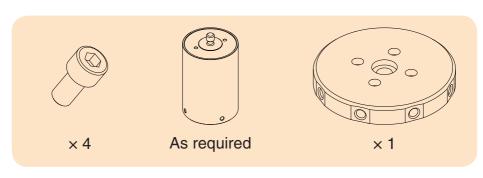





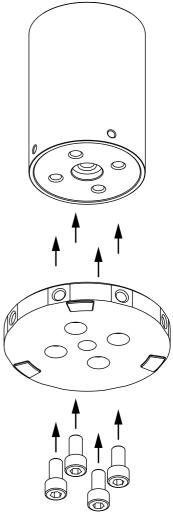


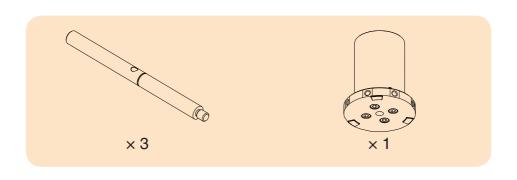


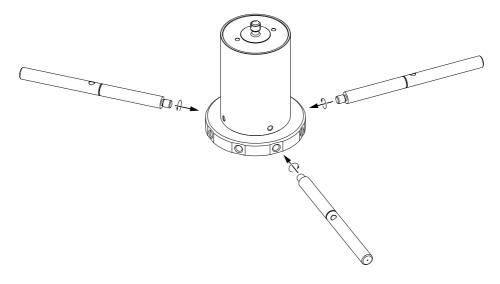


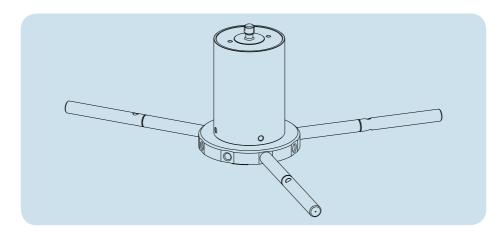


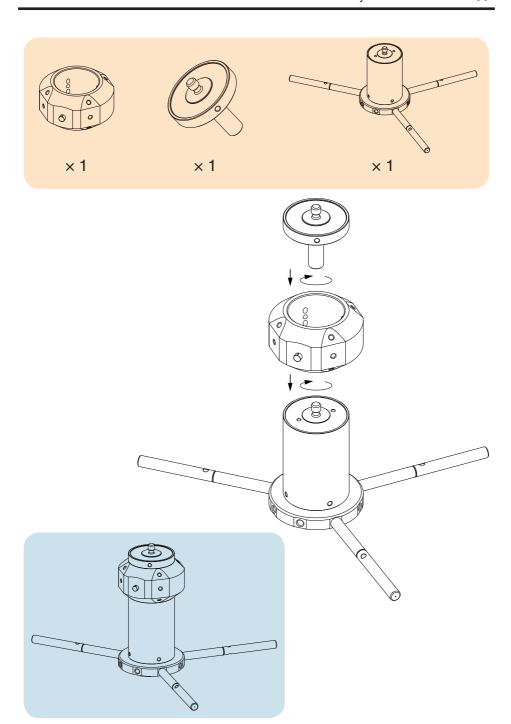


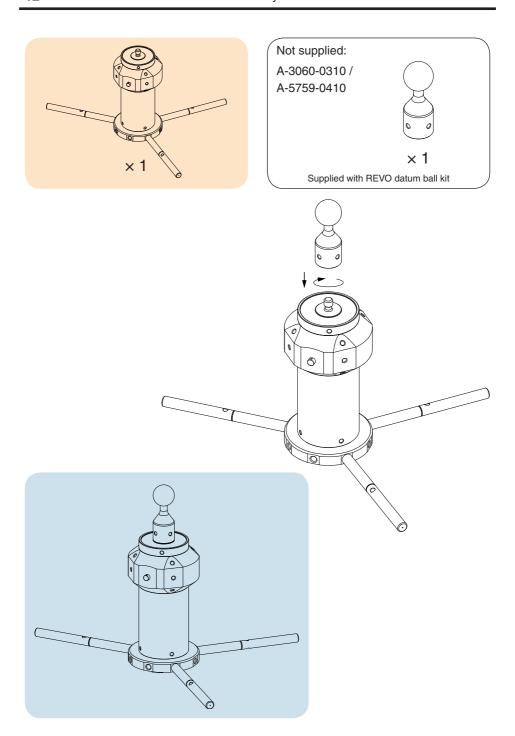








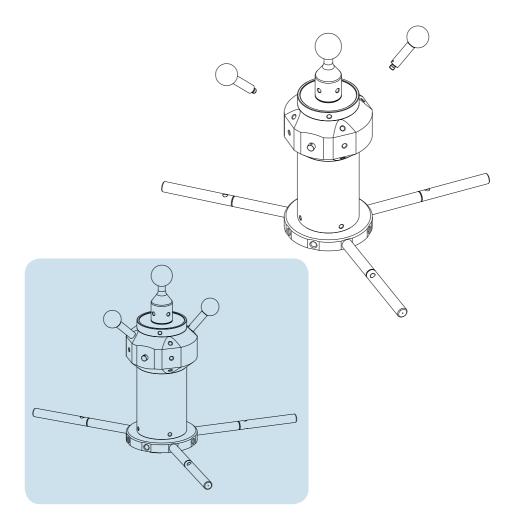







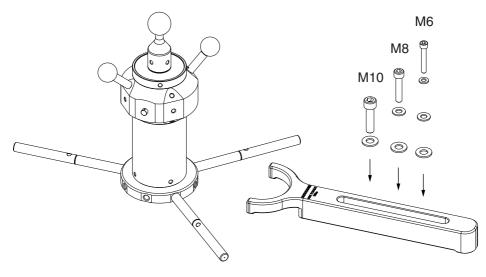

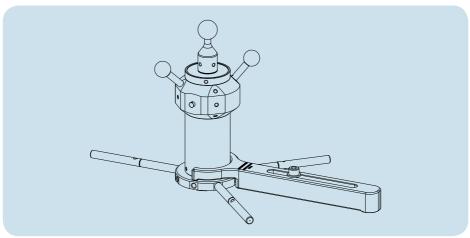

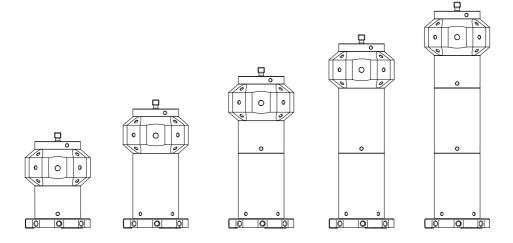

This page intentionally left blank



Renishaw plc

New Mills, Wotton-under-Edge, Gloucestershire, GL12 8JR United Kingdom T +44 (0)1453 524524 F +44 (0)1453 524901 E uk@renishaw.com

www.renishaw.com

RENISHAW.

apply innovation™

For worldwide contact details, please visit our main website at www.renishaw.com/contact



H-1000-5421-02