


RGH22 encoder system

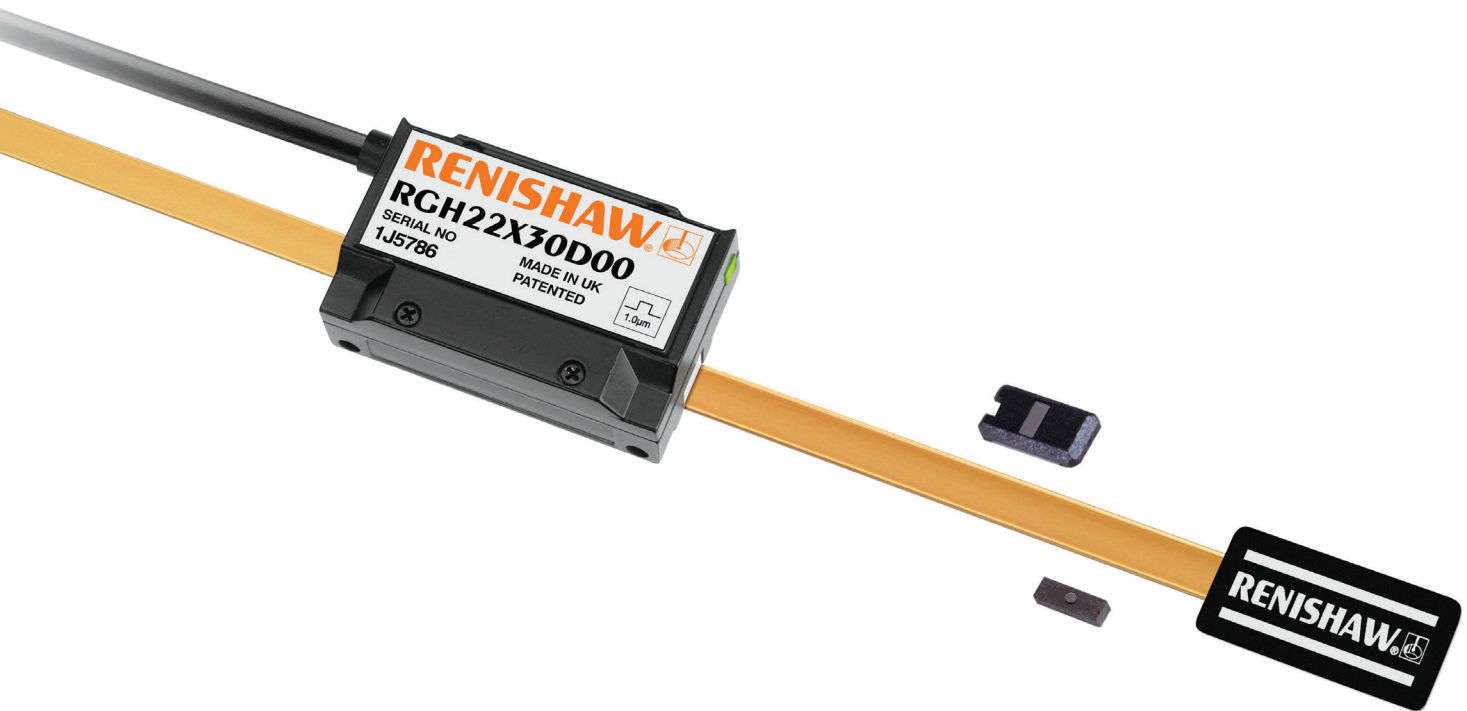

The Renishaw RGH22 series is a non-contact optical encoder system, providing highly-reliable position feedback. The RGH22 readhead features a set-up LED indicator for easy installation, unique filtering optics for excellent dirt immunity, and integrated interpolation down to 50 nm.

RGH22 offers proven reliability, performance and value, which makes it one of the most commonly applied encoder systems.

The RGH22 reads the 20 μm pitch RGS20-S gold tape-scale and outputs a choice of industry standard 1Vpp analogue or RS422 digital signals.

RGS20-S is suitable for mounting to most common engineering materials including metals, granites, ceramics and composites.

The scale can be mastered to the axis substrate by means of specially formulated pre-applied adhesive and epoxy fastened 'end clamps'.

This method ensures the differential movement between the scale and the substrate is close to zero, even with significant temperature swings.

The RGH22 range has also proven to be resilient to conditions considered challenging. They have been installed by many of the world's leading linear motion OEMs in a wide range of applications such as metrology, electronics, semiconductor and FPD manufacturing.

RGH22 readhead


- Non-contact open optical system
- Integral interpolation
- Industry standard digital and analogue options
- Resolutions from 5 μm to 50 nm
- Integral reference and limit sensors
- Integral set-up LED

RGS20-S scale

- 'Cut-to-length' convenience
- Lengths from 100 mm to 50 m
- Efficient, accurate installation
- Affixes to most common engineering materials
- Self-adhesive backing tape
- Applicator tool allows scale to be installed using the motion of the axis

RGH22 readhead installation drawing

Dimensions and tolerances in mm

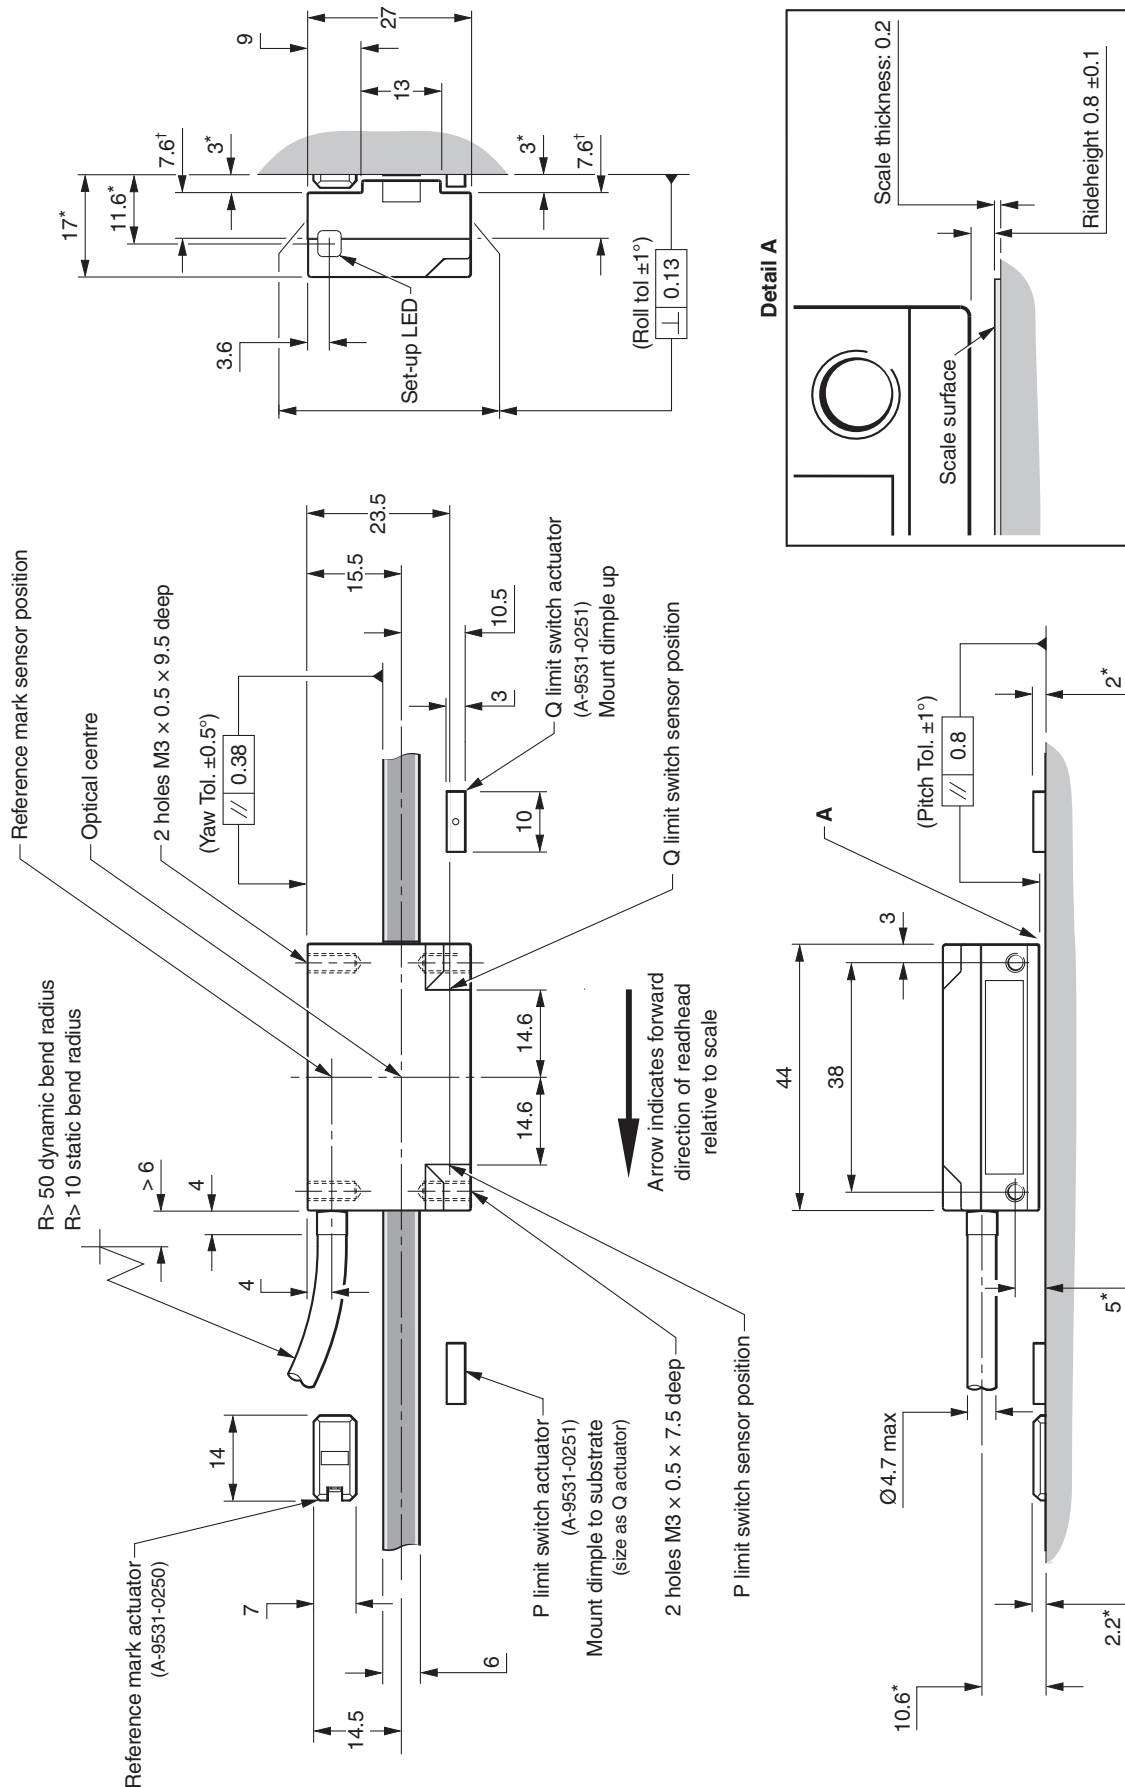


*Dimensions measured from substrate. [†]Alternative mounting faces

General specifications

| | | | | |
|-------------------|---------------|--|--------------------------|-----------------------------------|
| Power supply | 5 V ± 5% | 120 mA (typical), 200 mA RGH22Y, S and H. NOTE: Current consumption figures refer to unterminated readheads. For digital outputs a further 25 mA per channel pair (e.g. A+, A–) will be drawn when terminated with 120 Ω. For analogue outputs a further 20 mA will be drawn when terminated with 120 Ω. Power from a 5 V dc supply complying with the requirements for SELV of standard IEC BS EN 60950-1. | | |
| | Ripple | 200 mVpp@frequency up to 500 kHz maximum. | | |
| Temperature | Storage | –20 °C to +70 °C | | |
| | Operating | 0 °C to +55 °C | | |
| Humidity | | 95% relative humidity (non-condensing) to EN 60068-2-78 | | |
| Sealing | | IP50 | | |
| Acceleration | Operating | 500 m/s², 3 axes | | |
| Shock | Non-operating | 1000 m/s², 6 ms, ½ sine, 3 axes | | |
| Vibration | Operating | 100 m/s² max @ 55 Hz to 2000 Hz, 3 axes | | |
| Mass | Readhead | 45 g | | |
| | Cable | 38 g/m | | |
| Cable | | 12 core, double shielded, maximum diameter 4.7 mm. Flex life > 20 × 10 ⁶ cycles at 50 mm bend radius. | | |
| Connector options | | Code | Connector type | Application |
| | | D | 15-way D type plug | RGH22D, X, Z, Y, H, P, Q, R and S |
| | | R | 12-way circular plug | RGH22D, X, Z, Y, H, P, Q, R and S |
| | | L | 15-way D type plug | RGH22A and B |
| | | V | 12-way circular plug | RGH22B |
| | | W | 12-way circular coupling | RGH22B |
| | | F | unterminated cable | all readheads |
| | | X | 16-way in-line connector | all readheads |

Dimensions and tolerances in mm

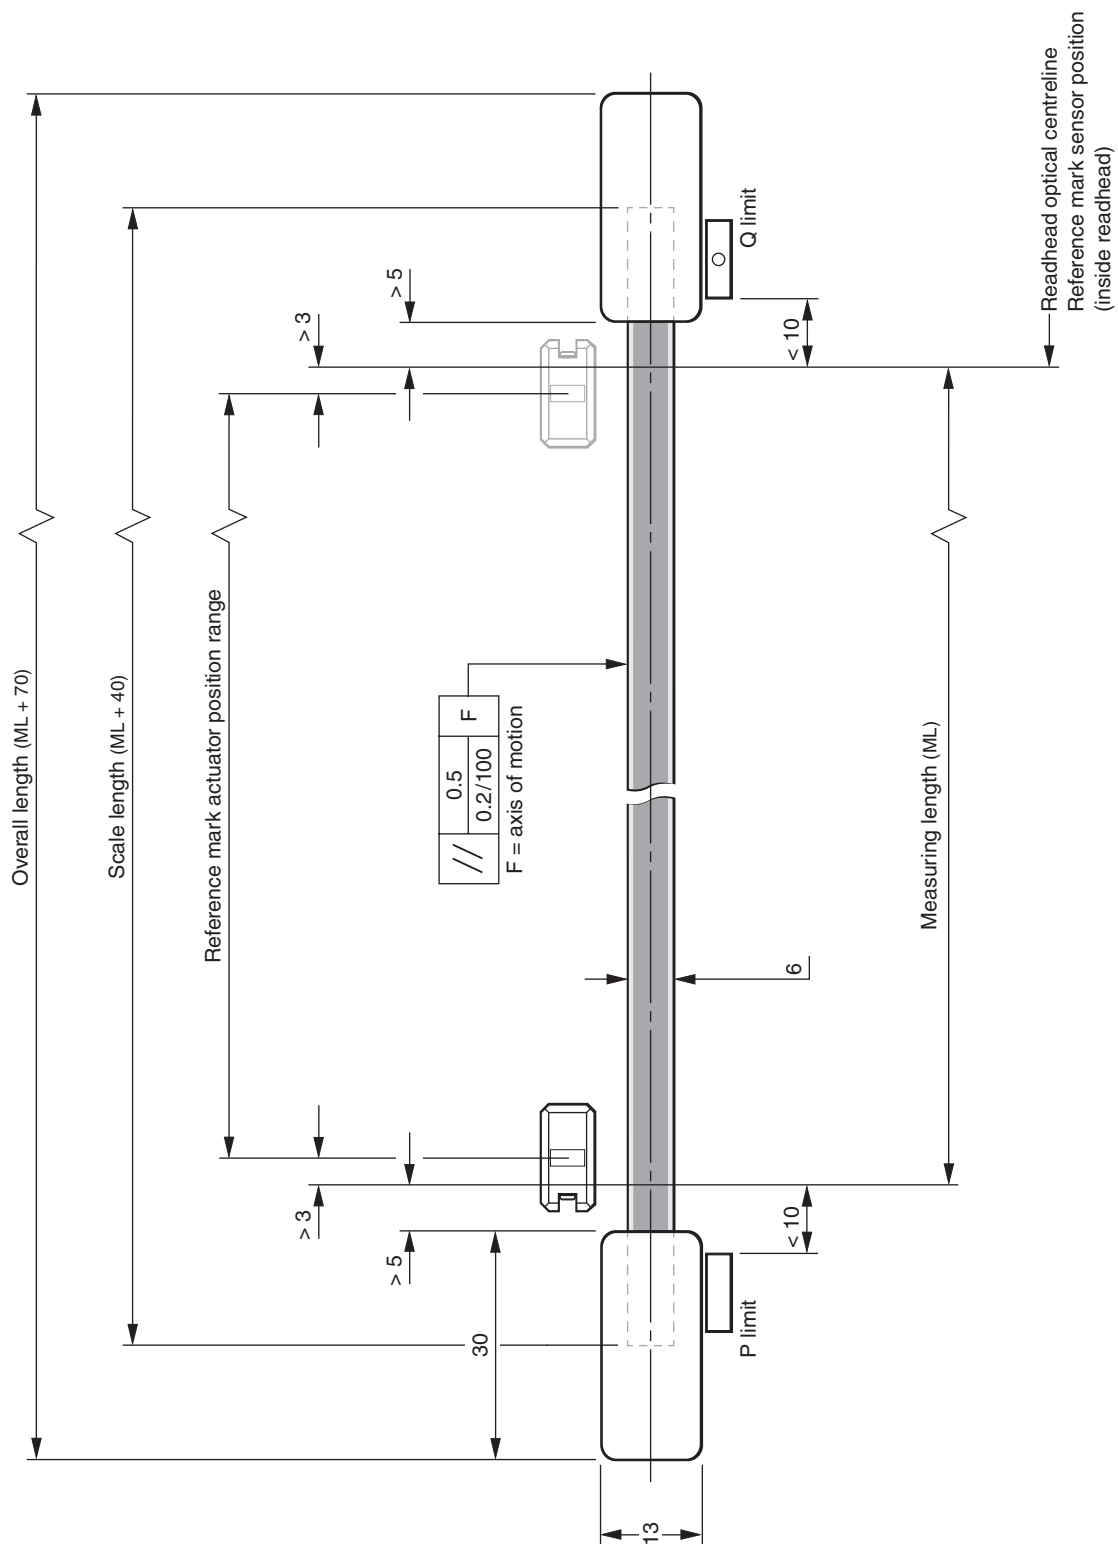

NOTE: The surface roughness of the scale mounting surface must be ≤ 3.2 Ra. The parallelism of the scale surface to the axis of motion (readhead rideheight variation) must be within 0.05 mm.

Scale specifications

| | | |
|---|--|-------------------|
| Scale type | Reflective gold plated steel tape with protective lacquer coating. Adhesive backing tape allows direct mounting to the machine substrate. | |
| Scale period | 20 µm | |
| Linearity | ±3 µm/m | |
| Scale length | Up to 50 m (> 50 m by special order) | |
| Form (H × W) | 0.2 mm × 6 mm (includes adhesive) | |
| Substrate materials | Metals, ceramics and composites with expansion coefficients between 0 and 22 µm/m/°C (steel, aluminium, Invar, granite, ceramic etc.) | |
| Coefficient of thermal expansion | Matches that of substrate material when scale ends are fixed by epoxy mounted end clamps | |
| End fixing | Epoxy mounted end clamps (A-9523-4015) using 2 part epoxy adhesive (A-9531-0342). Scale end movement typically < 1 µm up to +40 °C. | |
| Temperature | Operating | –10 °C to +120 °C |
| | Minimum installation | 10 °C |
| | Storage | –20 °C to +70 °C |
| Humidity | 95% relative humidity (non-condensing) to EN 60068-2-78 | |

Speed performance

Digital readheads

Non-clocked output readheads

| Head type | Maximum speed (m/s) | Lowest recommended counter input frequency (MHz) |
|-------------------------|---------------------|--|
| D and P (5 µm) | 10 | $\left(\frac{\text{Encoder velocity (m/s)}}{\text{Resolution (µm)}} \right) \times 4 \text{ safety factor}$ |
| X and Q (1 µm) | 5 | |
| Z and R (0.5 µm) | 3 | |

Clocked output readheads

The RGH22Y, S and H readheads are available with a variety of different clocked outputs. Customers must ensure they comply with the lowest recommended counter input frequency.

| Options | Maximum speed (m/s) | | Lowest recommended counter input frequency (MHz) |
|---------|---------------------|-----------|--|
| | Head type | | |
| | Y and S (0.1 μm) | H (50 nm) | |
| 61 | 1.3 | 0.6 | 20 |
| 62 | 0.7 | 0.3 | 10 |
| 63 | 0.35 | 0.15 | 5 |

Analogue readheads

RGH22A and B - 4 m/s (-3dB)

Output signals


Connections

Digital RS422A outputs - RGH22D, X, Z, Y, H, P, Q, R and S


| Function | Signal | | Colour | 15-way D-type plug (D) | 12-way circular (R) | 16-way in-line connector (X) |
|---------------------|--------|---|----------------|------------------------|---------------------|------------------------------|
| Power | 5 V | | Brown | 7 | 2 | A |
| | | | Brown (link) | 8 | 12 | M |
| | 0 V | | White | 2 | 10 | B |
| | | | White (link) | 9 | 11 | N |
| Incremental signals | A | + | Green | 14 | 5 | G |
| | | - | Yellow | 6 | 6 | D |
| | B | + | Blue | 13 | 8 | R |
| | | - | Red | 5 | 1 | F |
| Reference mark | Z | + | Violet | 12 | 3 | K |
| | | - | Grey | 4 | 4 | O |
| Limit switch* | Q | | Pink | 10 | - | H |
| Alarm | E | + | Black | 11 | 9 | I |
| | | - | Orange | 3 | 7 | P |
| External set-up | X | | Clear | 1 | - | E |
| Shield | Inner | | Green / Yellow | 15 | 11 (link) | L |
| | Outer | | - | Case | Case | Case |

*Dual limit versions (RGH22P, Q, R, S and H) utilise the black wire (pin 11) as the P limit output.
The 'E' alarm signal on these versions is only available at the orange wire as a single-ended E- output.
Dual limit readheads are only available with F, D or X terminations.
Please select the preferred option at time of ordering.


15-way D-type plug (termination code D)

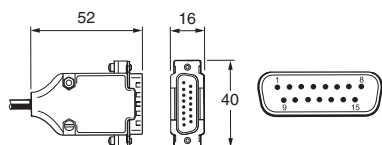

12-way circular plug (termination code R)

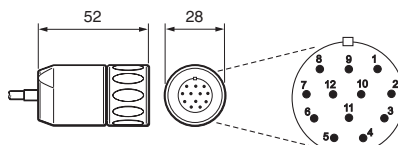

16-way in-line connector plug (termination code X)



Connections

Analogue 1 Vpp outputs - RGH22A and B

| Function | Signal | Colour | 15-way D-type plug (L) | 12-way circular (V) | 12-way circular coupling (W) | 16-way in-line connector (X) |
|---|----------------|----------------|------------------------|---------------------|------------------------------|------------------------------|
| Power | 5 V | Brown | 4 | 2 | 2 | A |
| | | Brown (link) | 5 | 12 | 12 | M |
| | 0 V | White | 12 | 10 | 10 | B |
| | | White (link) | 13 | 11 | 11 | N |
| Incremental signals | V ₁ | + | Red | 9 | 5 | F |
| | | – | Blue | 1 | 6 | R |
| | V ₂ | + | Yellow | 10 | 8 | D |
| | | – | Green | 2 | 1 | G |
| Reference mark | V ₀ | + | Violet | 3 | 3 | K |
| | | – | Grey | 11 | 4 | O |
| Limit switch* | V _q | Pink | 8 | N/C | N/C | H |
| External set-up | V _x | Clear | 7 | N/C | N/C | E |
| Reference mark uni-directional operation [‡] | BID | Black | 6 | 9 [†] | 9 ^{††} | I |
| | DIR | Orange | 14 | 7 [†] | 7 ^{††} | P |
| Shield | Inner | Green / Yellow | 15 | 11 (link) | 11 (link) | L |
| | Outer | – | Case | Case | Case | Case |

*Dual limit versions (RGH22A) utilise the clear wire (pin 7) as the V_p limit output. The V_x external set-up signal on these versions is not available.
Dual limit readheads are only available with F, L or X terminations.

[†]Only connected with option 17 ^{††}Only connected with option 18
Please select the preferred option at time of ordering.

[‡]Reference mark uni-directional operation


The RGH22 reference mark output is repeatable for one direction of travel only. Certain controllers will flag an error when they see different reference mark positions in the forward and reverse directions. BID DIR pins allow the readhead to be configured to ignore the reference pulse output in the unphased direction (see Installation guide for more information on reference mark set-up).

BID / DIR connections


| BID / DIR connection For bi-directional operation (normal) | To:- | Reference mark output direction |
|---|-----------------------|---------------------------------|
| BID | +5 V or not connected | Forward and reverse |
| DIR | Do not connect | |

| BID / DIR connection For uni-directional operation | To:- | Reference mark output direction |
|---|-----------------------|---------------------------------|
| BID | 0 V | |
| DIR | +5 V or not connected | Forward only |
| DIR | 0 V | Reverse only |


15-way D-type plug (termination code L)

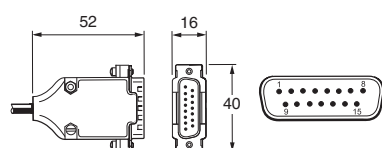


12-way circular plug (termination code V)

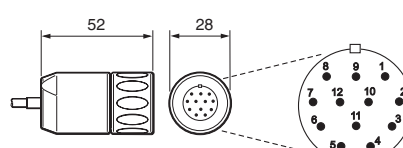

12-way circular coupling (termination code W)

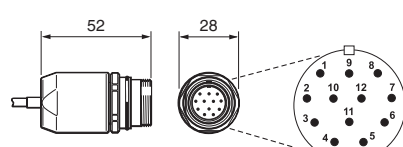


16-way in-line connector plug (termination code X)



Electrical connections

Grounding and shielding

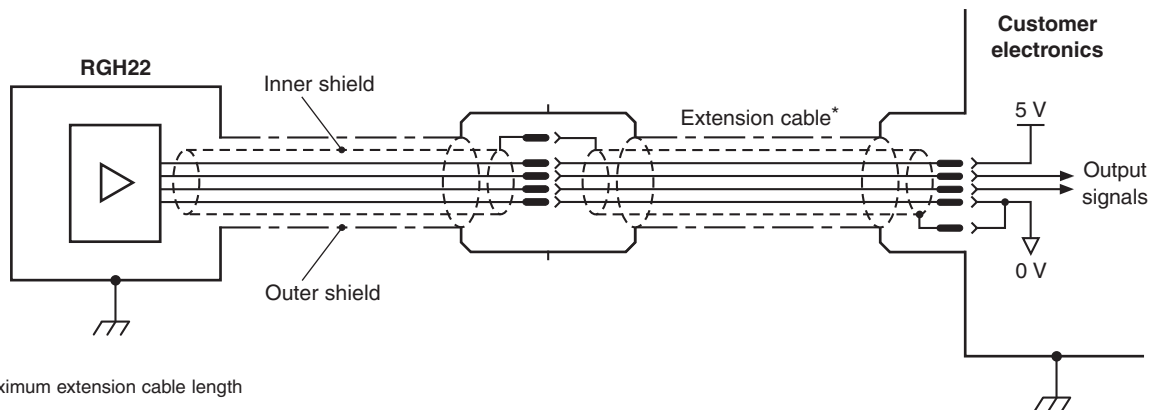


*Maximum extension cable length

RGH22A and B - 100 m, RGH22D, X, Z, P, Q and R - 50 m, RGH22Y, S and H - 20 m

IMPORTANT: The outer shield should be connected to the machine earth (Field Ground). The inner shield should be connected to 0 V. Care should be taken to ensure that the inner and outer shields are insulated from each other. If the inner and outer shields are connected together, this will cause a short between 0 V and earth, which could cause electrical noise issues.

Recommended signal termination

Digital outputs - RGH22D, X, Z, Y, H, P, Q, R and S

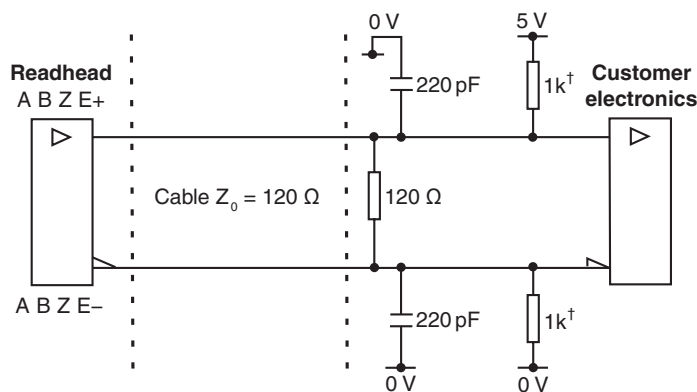


Standard RS422A line receiver circuitry.


Capacitors recommended for improved noise immunity.

†Only required on alarm channel E for fail safe operation.

Analogue output - RGH22 A and B



Limit output



Select R so that maximum current does not exceed 20 mA.


Alternatively, use a relay or opto-isolator.

Output specifications

Digital output signals - RGH22D, X, Z, Y, H, P, Q, R and S


Form - Square wave differential line driver to EIA RS422A (except limit switches P, Q and external set-up signal X)

Incremental† 2 channels A and B in quadrature (90° phase shifted)



| Model | P (μm) | S (μm) |
|--------------|--------|--------|
| RGH22D and P | 20 | 5 |
| RGH22X and Q | 4 | 1 |
| RGH22Z and R | 2 | 0.5 |
| RGH22Y and S | 0.4 | 0.1 |
| RGH22H | 0.2 | 0.05 |


Reference†




Synchronised pulse Z, duration as resolution S. Repeatability of position (uni-directional) maintained within $\pm 10^\circ\text{C}$ from installation temperature and for speed $< 250\text{ mm/s}$.
For RGH22Y, S and H only the Z pulse is re-synchronised at power-up with any one of the quadrature states (00, 01, 11, 10).
Actuation device A-9531-0250 or A-9531-0287.

Limit open collector output

Single limit RGH22D, X, Z and Y

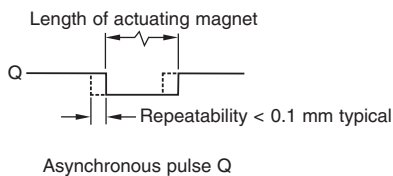


Dual limit RGH22P, Q, R, S and H*

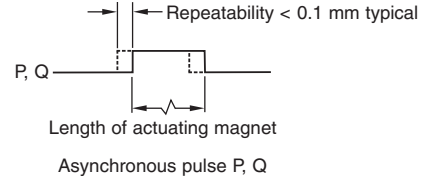

Actuation device A-9531-0251, A-9531-2052 or A-9531-2054.

*Dual limit available with flying lead, 15-way D-type connector or in-line X connector only.

External set-up

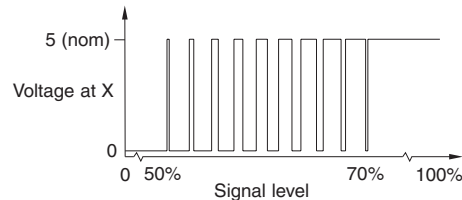

Between 50% and 70% signal level, X is a duty cycle.
Time spent at 5 V increases with signal level.
At $> 70\%$ signal level X is nominal 5 V.

Alarm

RGH22D, P, X, Q, Z and R

Alarm output asserted when $< 15\%$ signal

| Option | Alarm type |
|--------|--|
| 00A | Differential line driven output (RGH22D, X and Z only) |
| 00A | Single ended line driven output (RGH22P, Q and R only) |
| 20A | 3-state output |

RGH22Y, S and H


Options 61, 62 and 63

Single ended line driven output alarm asserted when $> 150\%$ signal or overspeed (RGH22S and H only).

Differential line driver output alarm asserted when $> 150\%$ signal or overspeed (RGH22Y only).

3-state output alarm asserted when $< 15\%$ signal.

Line driven alarm output†



E- only on dual limit readheads (RGH22P, Q, R, S and H only)

3-state alarm output


Differentially transmitted signals forced open circuit for $> 20\text{ ms}$ when alarm conditions valid.

†Inverse signals not shown for clarity.


Output specifications (continued)

Analogue 1 Vpp output signals - RGH22B and A

Incremental 2 channels V_1 and V_2 differential sinusoids in quadrature (90° phase shifted)

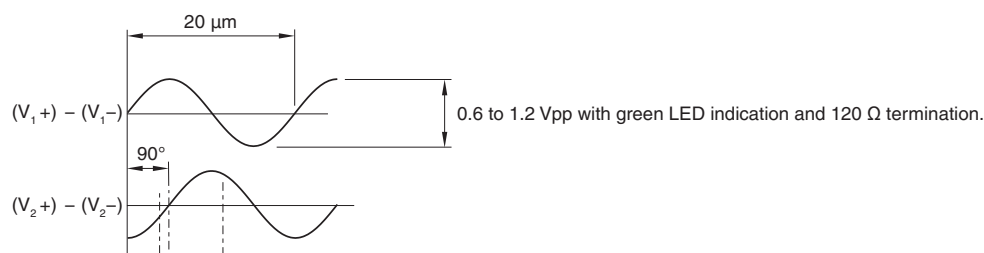

Reference

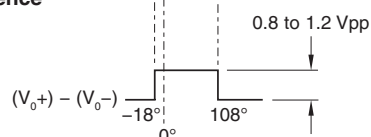


Differential pulse V_0 -18° to 108°. Duration 126° (electrical).

Repeatability of position (uni-directional) maintained within $\pm 10^\circ\text{C}$ from installation temperature and for speed < 250 mm/s.

Actuation device A-9531-0250 or A-9531-0287.


Limit open collector output

Single limit RGH22B

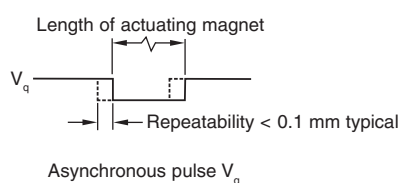


Actuation device A-9531-0251, A-9531-2052 or A-9531-2054.

Dual limit RGH22A

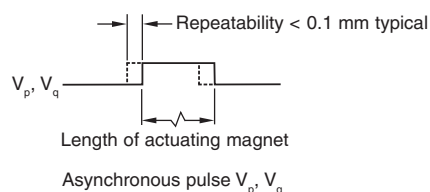

External set-up

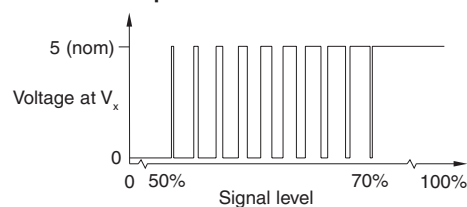

Between 50% and 70% signal level, V_x is a duty cycle.
Time spent at 5 V increases with signal level.
At > 70% signal level V_x is nominal 5 V.



RGH22 system = readhead



+ scale



+ accessories

Readhead part numbers

RGH22 D 15 D 00A

Readhead series

Output

Analogue

- A - 1 Vpp (dual limits)
- B - 1 Vpp (single limit)

Digital

- D - 5 µm (single limit)
- P - 5 µm (dual limits)
- X - 1 µm (single limit)
- Q - 1 µm (dual limits)
- Z - 0.5 µm (single limit)
- R - 0.5 µm (dual limits)
- Y - 0.1 µm (single limit)
- S - 0.1 µm (dual limits)
- H - 50 nm (dual limits)

Cable length

- 05 - 0.5 m
- 10 - 1 m
- 15 - 1.5 m
- 20 - 2 m
- 30 - 3 m
- 50 - 5 m

Termination

- D - 15-way D-type plug (RGH22D, H, P, Q, R, S, X, Y, and Z only)
- F - unterminated cable
- L - 15-way D-type plug (RGH22A and B only)
- R - 12-way circular plug (RGH22D, X, Y and Z only - limits not available)
- S - to be used in conjunction with options 17A and 18A (RGH22B only - limits not available)
- V - 12-way circular plug for analogue (RGH22B only - limits not available)
- W - 12-way circular coupling (RGH22B only - limits not available)
- X - 16-way in-line connector

Options

- 00A - standard (RGH22A, B, D, P, Q, R, X, and Z only)
- 17A - analogue output 1 Vpp, V termination with BID/DIR (RGH22B only)
- 18A - analogue output 1 Vpp, W termination with BID/DIR (RGH22B only)
- 20A - 3-state error annunciation (RGH22D, P, Q, R, X and Z only)
- 61A - 20 MHz customer clock, (RGH22Y, S, and H only)
- 62A - 10 MHz customer clock, (RGH22Y, S, and H only)
- 63A - 5 MHz customer clock, (RGH22Y, S, and H only)

NOTE: Not all combinations are valid. Check valid options online at www.renishaw.com/epc

Scale part numbers








RGS20-S

20 µm pitch lacquered tape scale with self-adhesive backing tape.

| Part number | Available lengths | Available in increments of | Ordering instructions |
|--------------------|----------------------|----------------------------|---|
| A-9517-0043 | 100 mm to 50,000 mm* | 1 mm | Ordering a quantity of 2455 will result in a length of 2455 mm (multiple orders are required for multiple lengths) |
| A-9517-0004 | 1 m to 50 m* | 1 m | Ordering a quantity of 15 will result in a length of 15 metres (multiple orders are required for multiple lengths) |
| A-9523-6xxx | 10 cm to 999 cm | 1 cm | xxx is the length in cm (ordering A-9523-6450 for example will result in a length of 450 cm) |
| A-9523-80xx | 10 m to 50 m* | 1 m | xx is the length in metres (ordering A-9523-8033 for example will result in a length of 33 metres) |

*Lengths above 50 m are special order only. Please contact your local Renishaw representative.

Accessory part numbers

| Part number | Description | Image |
|--------------------|---|---|
| A-9531-0250 | RGM22S reference mark actuator magnet – epoxy mounted. A reference sensor within the readhead is used to determine an absolute datum within an incremental measuring system. The sensor does this by detecting the external RGM22S reference mark actuator magnet as the readhead passes it. |  |
| A-9531-0287 | RGM22SB reference mark actuator magnet – screw mounted. A reference sensor within the readhead is used to determine an absolute datum within an incremental measuring system. The sensor does this by detecting the external RGM22SB reference mark actuator magnet as the readhead passes it. |  |
| A-9531-0251 | RGP22S limit switch actuator magnet 10 mm long – epoxy mounted. A limit sensor within the readhead detects end of travel by sensing the RGP22S limit switch actuator magnet. |  |
| A-9531-2052 | RGP22SM limit switch actuator magnet 24.35 mm long – epoxy mounted. A limit sensor within the readhead detects end of travel by sensing the RGP22SM limit switch actuator magnet. |  |
| A-9531-2054 | RGP22SL limit switch actuator magnet 50 mm long – epoxy mounted. A limit sensor within the readhead detects end of travel by sensing the RGP22SL limit switch actuator magnet. |  |
| A-9523-4015 | RGC-F end clamp kit – epoxy mounted. The RGC-F end clamps master the RGS20-S scale to the substrate material to match its thermal expansion. |  |
| A-9531-0342 | RGG-2 2 part epoxy adhesive. The RGG-2 epoxy is recommended for the mounting of reference marks, limit switches and end clamps. |  |
| A-9531-0265 | RGA22 scale applicator kit (for RGS20-S lacquered scale). The RGA22 enables efficient and accurate scale application. It is particularly suited to long axes or limited access installations as the backing paper is automatically removed during scale application requiring minimal intervention. |  |
| A-9531-0239 | RGA22G scale applicator guide block (for RGS20-S lacquered scale). The RGA22G offers the benefits of RGA22 in a simplified form, and is ideally suited to shorter axes. |  |

Renishaw plc
New Mills, Wotton-under-Edge
Gloucestershire, GL12 8JR
United Kingdom

T +44 (0)1453 524524
F +44 (0)1453 524901
E uk@renishaw.com
www.renishaw.com



For worldwide contact details, visit www.renishaw.com/contact

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

© 2001-2019 Renishaw plc. All rights reserved.

Renishaw reserves the right to change specifications without notice.

RENISHAW and the probe symbol used in the RENISHAW logo are registered trade marks of Renishaw plc in the United Kingdom and other countries. **apply innovation** and names and designations of other Renishaw products and technologies are trade marks of Renishaw plc or its subsidiaries. All other brand names and product names used in this document are trade names, trade marks or registered trade marks of their respective owners.



L - 9517 - 9676 - 01

Part no.: L-9517-9676-01-E
Issued: 10.2019