


RLU20 laser unit

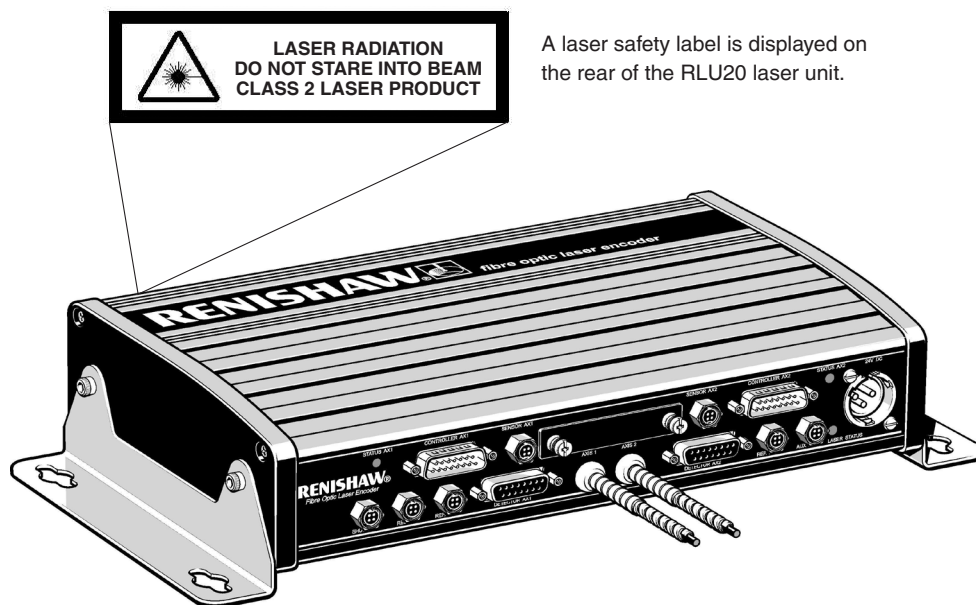

The Renishaw RLE fibre optic laser encoder uses interferometry to provide high resolution, high linearity position feedback.

The RLE system comprises an RLU laser unit and one or two RLD detector heads. The RLU laser unit contains the laser source and signal processing electronics. It is available with one or two fibre optic laser outputs that deliver laser light directly to the RLD detector heads. The detector head is the core of the optical measuring system containing the interferometer optics, novel Renishaw detection scheme and beam steering mechanism(s).¹

The RLE range offers a variety of laser units and detector heads to suit specific application requirements - all system components are compatible with each other.

This datasheet describes the RLU20, a laser unit with enhanced frequency stability - see performance details on page 3. Position feedback signals are provided for each axis independently, in either digital quadrature format or analogue quadrature format.

The resolution and format of the signals are determined by front panel switches and detector head type. The laser unit also provides system status outputs and allows configuration of signal bandwidth, direction sense and error monitoring.


Position feedback signals from the RLU can be used directly, or connected via either the RCU10 compensation system (which automatically compensates for air refraction and/or material expansion effects) or via one of the available range of interpolator units to produce an ultra-high resolution output.

The RLU20 includes an electrical signal input that can be used to shut off the laser beam without destabilising the laser.

¹ The differential interferometer detector head has separate beam steerers for each pair of beams.

General outline and dimensions

Dimensions in mm (inches)

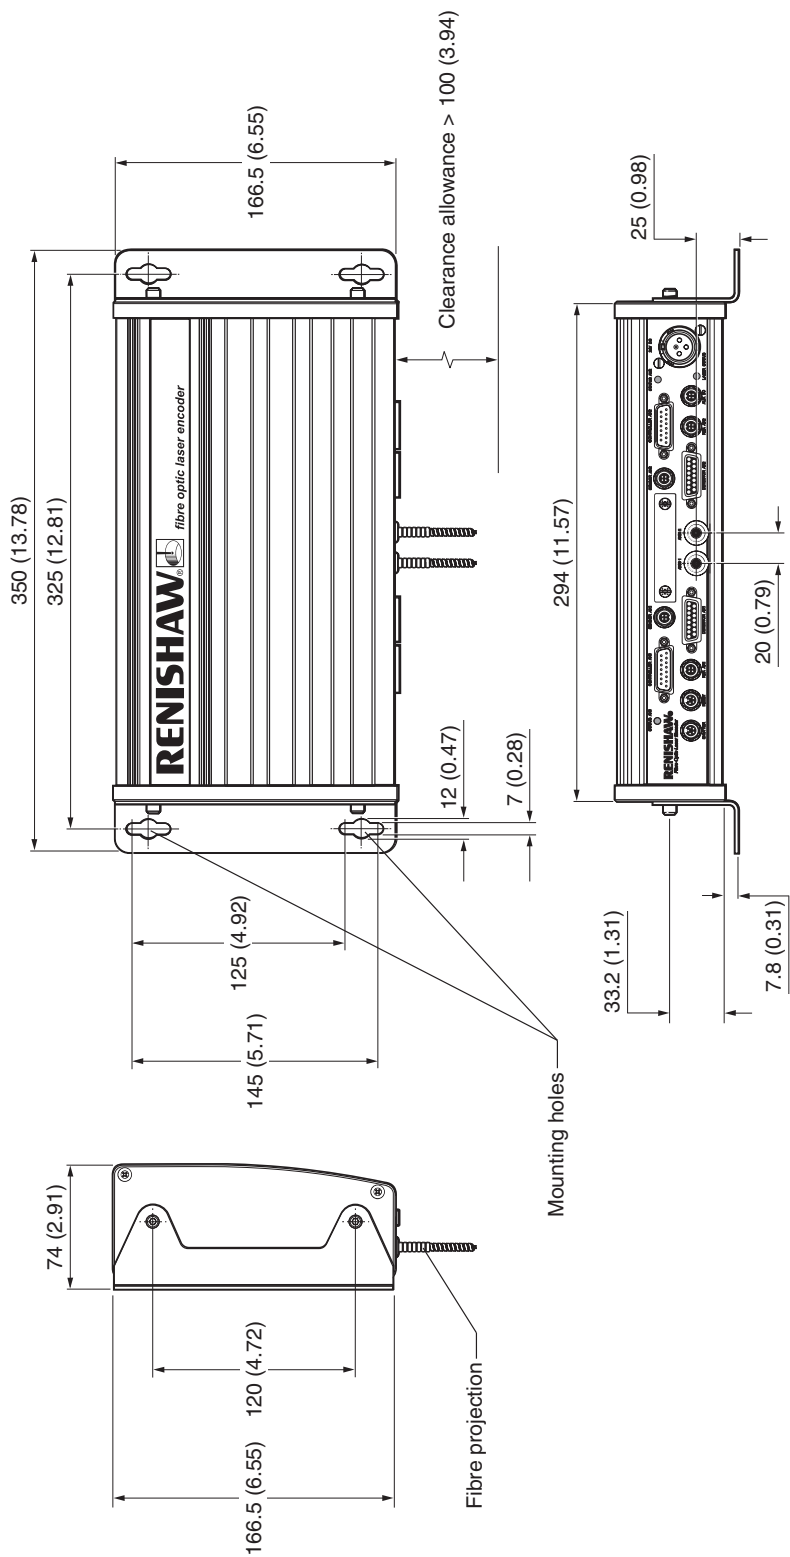

Overall dimensions	
Height	74 (2.91)
Length	350 (13.78)
Width	166.5 (6.55)

NOTES:

- The RLU can be mounted in any orientation, provided the surface is reasonably flat and free from vibration. The minimum cable and fibre bend radius is 25 mm (0.98).
- Fixing: 4 off M6 x 1.0 x 15 mm or 1/4-20-UNC x 5/8 cap head screws.


RLU20 laser unit performance

Laser type	HeNe Class II	Maximum output power from laser tube < 1 mW
Output beam intensity	< 300 μ W (cw) / axis	During preheat this can rise up to 600 μ W
Laser beam diameter	3 mm	
NTP wavelength (T = 20 °C, P = 1013.25 mbar, RH = 50%)	632.818270 nm	Axis 1
	632.819719 nm	Axis 2
Vacuum wavelength accuracy	$\pm$ 0.1 ppm over three years	
Laser frequency stability	< $\pm$ 1 ppb	1 minute
	< $\pm$ 2 ppb	1 hour
	< $\pm$ 20 ppb	8 hours
Fibre optic diameter (armoured)	5 mm	
Analogue output signal period	158 nm	Plane mirror interferometer
	316 nm	Retroreflector interferometer
Digital quadrature nominal output resolutions	10, 20, 39.5, 79, 158, and 316 nm	Plane mirror interferometer
	20, 39.5, 79, 158, 316 and 633 nm	Retroreflector interferometer
Output update rates	0.3125, 0.625, 1.25, 2.5, 5, 10 and 20 MHz	User selectable update rate options
Maximum velocity (resolution dependent)	1 m/sec	Plane mirror interferometer
	2 m/sec	Retroreflector interferometer
Output formats	Dual RS422 differential digital quadrature 1 V peak to peak sine/cosine signals	
Power supply requirements	24 V $\pm$ 2 V @ 2.5 A	Inrush (first 10 ms)
	24 V $\pm$ 2 V @ 1.6 A	Warm-up (~10 mins)
	24 V $\pm$ 2 V @ 0.6 A	Operation at room temperature (20 °C)
RLU weight	2.8 kg	
Operating environment		
	Pressure 650 mbar to 1150 mbar	Normal atmospheric
	Humidity 0% to 95% RH	Non-condensing
	Temperature 0% to 95% RH	

RLU output signals


Digital incremental

RS422 digital quadrature

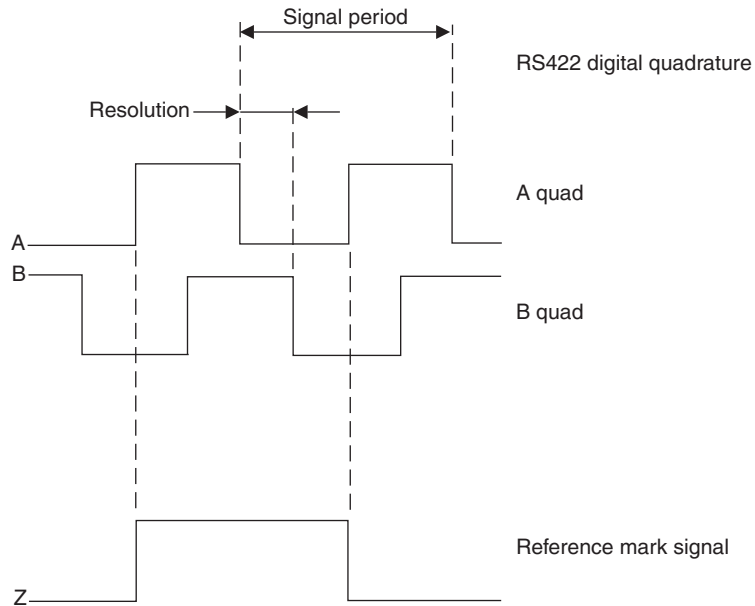

Analogue incremental

1 Vpp differential sine and cosine

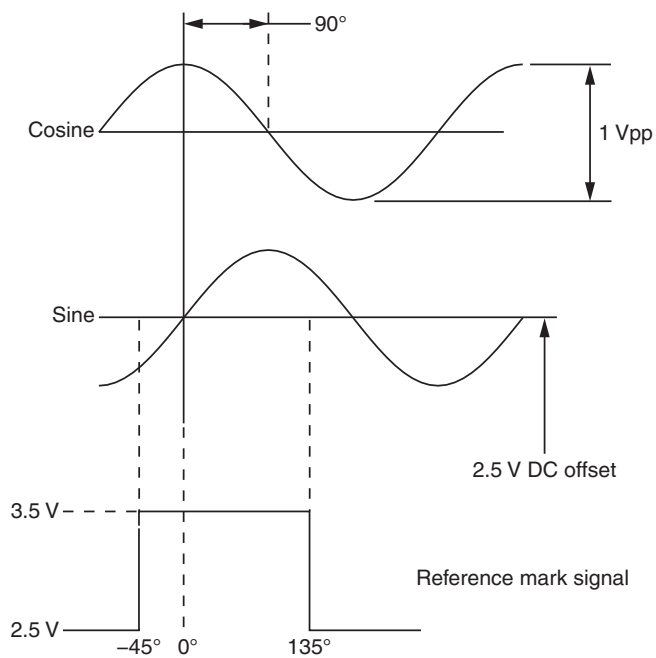

RLU identification and ordering

The RLU is normally supplied with the appropriate RLD detector heads as a configured RLE fibre optic laser encoder system. For special applications or spares requirements the RLU20 laser unit is available separately.

For full details of available RLE system configurations and part numbers visit www.renishaw.com/laserencoders or consult your local Renishaw representative.

Compliant with EU directive 2011/65/EU (RoHS).

www.renishaw.com/contact



#renishaw



+44 (0) 1453 524524



uk@renishaw.com

© 2001–2026 Renishaw plc. All rights reserved. This document may not be copied or reproduced in whole or in part, or transferred to any other media or language by any means, without the prior written permission of Renishaw.

RENISHAW® and the probe symbol are registered trade marks of Renishaw plc. Renishaw product names, designations and the mark 'apply innovation' are trade marks of Renishaw plc or its subsidiaries. Other brand, product or company names are trade marks of their respective owners.

WHILE CONSIDERABLE EFFORT WAS MADE TO VERIFY THE ACCURACY OF THIS DOCUMENT AT PUBLICATION, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS AND LIABILITY, HOWSOEVER ARISING, ARE EXCLUDED TO THE EXTENT PERMITTED BY LAW. RENISHAW RESERVES THE RIGHT TO MAKE CHANGES TO THIS DOCUMENT AND TO THE EQUIPMENT, AND/OR SOFTWARE AND THE SPECIFICATION DESCRIBED HEREIN WITHOUT OBLIGATION TO PROVIDE NOTICE OF SUCH CHANGES.

Renishaw plc. Registered in England and Wales. Company no: 1106260. Registered office: New Mills, Wotton-under-Edge, Glos, GL12 8JR, UK.

Part no.: L-9904-2350-05-A

Issued: 05.2026